

RUOTE DENTATE IN GHISA

Z


MATERIALE: GHISA G20 - UNI 5007

Modulo	2	2.5	3	3.5	4	4.5	5
Fori D ₁	15	18	20	20	25	25	30
Fascia B	20	25	30	35	40	45	50
30	dp				120	135	150
	de				128	144	160
	dm				70	70	80
35	dp			122.5	140	157.5	175
	de			129.5	148	166.5	185
	dm			60	70	70	80
40	dp			140	160	180	200
	de			147	168	189	210
	dm			60	70	70	80
45	dp		112.5	135	157.5	180	202.5
	de		117.5	141	163.5	188	211.5
	dm		50	50	60	70	70
50	dp	100	125	175	200	225	250
	de	104	130	182	208	234	260
	dm	40	50	60	70	70	80
60	dp		180				
	de		186				
	dm		50				

Ruote ad esaurimento

Ruote dentate cilindriche

Angolo pressione 20°

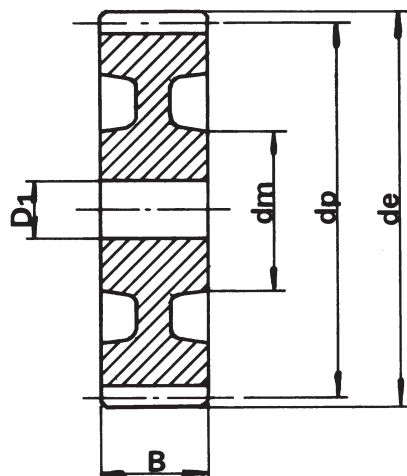


C R E M A G L I E R E

MATERIALE: C40 - TRAFILATO - NORMALIZZATO

Modulo	Dimensioni b x h		h ₀	L	kg.
	b	h			
1	15	15	14	500	0.820
	15	15	14	1000	1.640
	15	15	14	2000	3.200
1.5	17	17	15.5	500	1.000
	17	17	15.5	1000	2.050
	17	17	15.5	2000	4.000
2	20	20	18	500	1.410
	20	20	18	1000	2.750
	20	20	18	2000	5.500
2.5	25	25	22.5	500	2.100
	25	25	22.5	1000	4.500
	25	25	22.5	2000	9.000
3	30	30	27	500	3.100
	30	30	27	1000	6.500
	30	30	27	2000	13.000
4	30	30	26	500	3.050
	30	30	26	1000	6.100
	30	30	26	2000	12.500
4	40	40	36	500	5.500
	40	40	36	1000	11.000
	40	40	36	2000	23.000
5	50	50	45	500	8.300
	50	50	45	1000	17.500
	50	50	45	2000	35.000
6	60	60	54	500	12.650
	60	60	54	1000	25.500
	60	60	54	2000	51.000
10	80	80	70	2000	77.000

Cremagliere

Angolo di pressione 20°

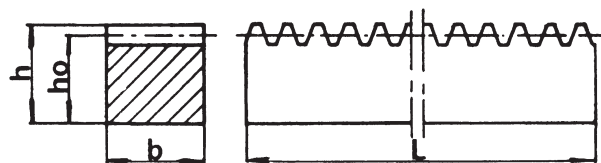

N.B. A richiesta costruiamo cremagliere da M 7 a M 16